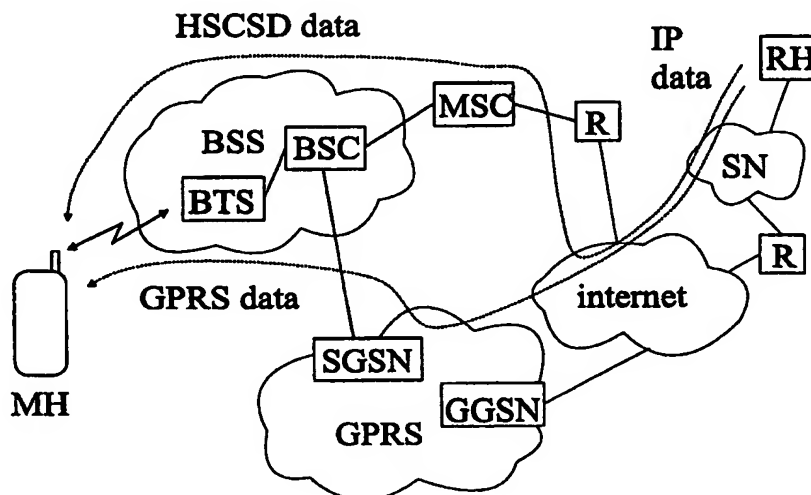




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>H04Q 7/38, H04L 29/06</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 99/33301</b> <b>(43) International Publication Date:</b> 1 July 1999 (01.07.99)
<b>(21) International Application Number:</b> PCT/FI98/00948 <b>(22) International Filing Date:</b> 7 December 1998 (07.12.98) <b>(30) Priority Data:</b> 974558 18 December 1997 (18.12.97) FI <b>(71) Applicant (for all designated States except US):</b> NOKIA MOBILE PHONES LTD. [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI). <b>(72) Inventors; and</b> <b>(75) Inventors/Applicants (for US only):</b> TURUNEN, Matti [FI/FI]; Kirkkoladunkatu 28 B 7, FIN-33560 Tampere (FI). MIKKONEN, Jouni [FI/FI]; Kaaponkuja 3 A 4, FIN-33820 Tampere (FI). <b>(74) Agent:</b> JOHANSSON, Folke; Nokia Mobile Phones Ltd., P.O. Box 100, FIN-00045 Nokia Group (FI).		<b>(81) Designated States:</b> AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR; HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: RESOURCE RESERVATION IN MOBILE INTERNET PROTOCOL



## (57) Abstract

A method of transmitting Internet data between a mobile host and a remote host coupled via the Internet and a GSM/GPRS cellular telephone network. A plurality of Internet Quality of Service (QoS) levels are defined, in terms of the guaranteed transmission delay over the Internet, using RSVP. A guaranteed QoS is mapped to a circuit switched transmission mode (HSCSD) of the telephone network whilst a Controlled Load and a Best Effort QoS are mapped respectively to two different service levels of a packet switched transmission mode (GPRS) of the radio telephone network. Prior to transmitting Internet data, transmission capacity in the Internet is reserved, if necessary, to ensure the allocated QoS level is met. The transmission is then made over the Internet and the telephone network, using the transmission mode in the telephone network which is mapped to the allocated QoS.

REST AVAILABLE COPY

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## Resource Reservation in Mobile Internet Protocol

The present invention relates to a mobile Internet protocol for enabling a mobile terminal to access the Internet.

5

The term "Internet" is commonly used to describe an information resource which can be accessed using a host, typically a PC, connected via a modem to a telecommunications network. This resource is stored at many different sites remote from the accessing computer, although each of the remote sites is also linked to the telecommunications  
10 network. The Internet is made workable by the specification of a standard communications system which makes use of a number of protocols, Transfer Control Protocol (TCP), User Datagram Protocol (UDP), and Internet Protocol (IP), to control the flow of data around the numerous different components of the Internet. Whilst TCP and UDP are concerned with the prevention and correction of errors in transmitted  
15 Internet data, IP is concerned with the structuring and routing of data. Current versions of IP are IPv4 and IPv6.

The Internet is physically constructed from a hierarchy of telecommunication networks, for example local area networks (LANs), regional telephone networks, and international  
20 telephone networks. These networks are connected internally and externally by so-called "routers" which receive data from a source host, or a previous router in the transmission chain, and route it to the destination host or the next router in the transmission chain. Figure 1 illustrates the case of a source host (SH) and a destination host (DH) coupled to the Internet via respective local area networks (LN)  
25 and routers (R).

A host connected to the Internet via a LAN either has an Internet address permanently allocated to it or has an address dynamically allocated by a network server (e.g. using Dynamic Host Configuration Protocol (DHCP)). In the case of a host connected to a  
30 telephone network via a modem, the host must request an Internet address from an Internet service provider to which the host subscribes. This is done according to a Point to Point Protocol (PPP) which runs over the IP. In either case, Internet data is

routed to the host (possibly via several networks and routers) from some remote source, using the allocated Internet address.

- 5 IP defines the transmission of Internet data by way of data packets ("datagrams"). This packet data transfer is one of the main reasons for the success of the Internet as it results in "bursty" transmission which does not require the continuous reservation of a telephone connection and allows many hosts to share the same telephone connections. When a router receives a datagram including a destination address, the router will route the datagram if capacity is available, both in the buffer memory of the router and on the  
10 telephone lines. If the router cannot obtain capacity for the datagram then the datagram is rejected and the sending host, or preceding router, must try again at a later time. In general, Internet access is not time critical and the "Best Effort" provided by IP is satisfactory.
- 15 Packet data transfer provides efficiencies in data transmission in general, and not only in the retrieval of information from the Internet. For example, packet data transfer may be applied to applications such as voice telephony, video conferencing, and standard data transfer. However, certain of these applications are time critical. Considering real time voice telephony, the Best Effort service provided by IP may result in considerable  
20 delays in the transmission of voice data making a received voice signal difficult or impossible to understand. The same applies for the transmission of real time video data. There may also be occasions on which Internet users do not wish to suffer the delays often experienced with conventional Internet data retrieval.
- 25 The Internet Engineering Task Force (IETF) is a body which is concerned with the evolution of Internet architecture and the smooth operation of the Internet. The IETF is currently developing a new protocol which will allow a host to request one of a number of reception quality levels (Quality of Service QoS). This protocol is known as Resource ReSerVation Protocol (RSVP) and is outlined in "Resource ReSerVation  
30 Protocol (RSVP) - Version 1 Functional Specification", Braden, R., Zhang, L., Berson, S., Herzog, S., Jamin, S., RFC 2205, September 1997, Proposed Standard (available at <http://www.isi.edu/div7/rsvp/pub.html>). A host uses RSVP to request a specific Quality of Service (QoS) from the network, on behalf of an application data stream

which it wishes to receive from some remote host. RSVP carries the request through the network, visiting each router that the network uses to carry the stream. At each router, RSVP attempts to make a resource reservation for the stream. RSVP also attempts to make a resource reservation for the stream at the receiving host and at the sending host.

To make a resource reservation at a node (either a router or a host), the RSVP communicates with two local decision modules, admission control and policy control. Admission control determines whether the node has sufficient available resources to supply the requested QoS. Policy control determines whether the user has administrative permission to make the reservation. If either check fails, the RSVP returns an error notification to the application process that originated the request. If both checks succeed, the RSVP sets parameters in a packet classifier and packet scheduler, at the sending host, to obtain the desired QoS. The packet classifier determines the QoS class for each packet and the scheduler orders packet transmission to achieve the promised QoS for each stream.

RSVP runs over IP, both IPv4 and IPv6. In particular, RSVP is designed to utilise the robustness of current Internet routing algorithms. RSVP does not perform its own routing but instead uses underlying routing protocols to determine where it should carry reservation requests. As routing changes paths to adapt to topology changes, RSVP adapts its reservation to the new paths wherever reservations are in place.

In the current proposed version of RSVP, two QoS levels can be negotiated; Guaranteed Service and Controlled Load Service (in addition to the basic Best Effort service). Guaranteed Service provides both a fixed transmission delay and a fixed bandwidth and is suited to Internet transmissions such as real time voice telephony. Controlled Load Service provides a service level to a data stream which closely approximating the service level that that same data stream would receive from an unloaded network, even when the network is overloaded. Controlled Load Service is suited to applications where some transmission delay can be tolerated but where it is desired to minimise this delay. In the event that one of these superior QoS levels is not negotiated by RSVP, then Internet data will be received using the conventional Best

Effort service. It is possible that in the future RSVP will be extended to provide for the reservation of more than two different additional QoS levels.

5 With the increased use of mobile cellular telephones, there is a growing demand for so-called mobile Internet access, where access is made from a portable computer connected to a cellular telephone or from an integrated computer/cellular phone device. Currently, subscribers of certain digital cellular telephone networks are able to obtain mobile Internet access by opening a "voice channel" to the cellular network. This channel is reserved for the duration of the Internet "call" and is referred to as a Circuit  
10 Switched Data (CSD) channel. A CSD channel is always fully "owned" by a user and thus cannot be violated by other users. It will be appreciated that a CSD channel is not efficient for the bursty transmission of Internet data.

Under current proposals, it seems likely that future digital cellular telephone systems  
15 will include provision for packet switched transmission channels as well as for circuit switched channels. The general view is that the former will be used for data transmissions, e.g. fax, e-mail, Internet access, whilst the latter will be used for voice calls and possibly combined video/voice calls. In Europe, the current digital cellular telephone standard is known as GSM (Global System for Mobile communications). In  
20 the proposed GSM phase 2 system, the packet switched transmission service is known as the General Packet Radio Service (GPRS) whilst the enhanced CSD service is known as High Speed Circuit Switched Data (HSCSD). GPRS and HSCSD are currently the subject of recommendations GSM 02.60, GSM 03.60 and GSM 03.34 of the European Telecommunications Standards Institute (ETSI). For a general  
25 discussion of likely future cellular telephone systems reference should be made to "Design of GSM High Speed Data Services", Jari Hamalainen, Dr. Tech Thesis, Tampere Univ of Technology, Finland, October 1996.

It is likely that GPRS will define a number of Quality of Service (QoS) levels in terms of  
30 transmission delay, bandwidth, and retransmission (in case of error). Under an existing proposal, four QoS levels are defined (classes 1 to 4). In another possible implementation of GPRS, two main classes may be defined, "delay class" and "service precedents priority", each class having one or more sub-classes.

In order to facilitate the integration of mobile cellular telephony and Internet access, which, as will be apparent from the above discussion, both use different transmission protocols, a protocol known as Mobile IP is under development by the Internet Engineering Task Force (IETF). This protocol is known as RFC2002 and will control the routing of data between a mobile host and the Internet and enable the "roaming" of a mobile host between different networks. Mobile IP also controls the routing of data within the packet switched and circuit switched "domains" which both form separate data transmission routes within a cellular telephone network.

It is an object of the present invention to enable RSVP to reserve digital cellular telephone services for the transfer of Internet data, and thus to facilitate the substantially seamless flow of Internet data across the Internet and digital cellular telephone networks.

This and other objects are achieved by mapping RSVP QoS levels to service levels provided by cellular telephone networks.

According to a first aspect of the present invention there is provided a method of transmitting data between first and second Internet hosts coupled via the Internet and a digital radio telephone network, the method comprising:

defining a plurality of Internet Quality of Service (QoS) levels in terms of the transmission delay over the Internet;

mapping at least one of the defined Internet QoS levels to a circuit switched transmission mode of the radio telephone network and mapping the remaining QoS level(s) to a packet switched transmission mode of the radio telephone network;

prior to transmitting said data, allocating one of said QoS levels to the transmission and, if necessary, reserving transmission capacity in the Internet to ensure the allocated QoS level is met; and

transmitting said data over the Internet and said radio telephone network, wherein the transmission over the radio telephone network uses the transmission mode mapped to the allocated QoS level.

Preferably, said Internet QoS levels include: a guaranteed service level which guarantees both delay and bandwidth; a controlled load service level which provides a service level closely approximating the service level that would be provided by an unloaded network, even when the network is overloaded; and a best effort service  
5 which guarantees neither delay nor bandwidth. More preferably, the QoS levels are defined by a Resource ReSerVation Protocol (RSVP) which is also responsible for said reservation of transmission capacity in the Internet.

With the Internet QoS levels set out above, the guaranteed QoS level is mapped to the  
10 circuit switched transmission mode of the radio telephone network. This ensures that transmissions over the radio telephone network occur with a guaranteed delay and bandwidth, i.e. corresponding to that for transmissions over the Internet. Other Internet QoS levels are mapped to the packet switched transmission mode. Where the packet  
15 switched transmission mode of the radio telephone network itself offers a number of QoS levels, there may be a sub-mapping between these QoS levels and the Internet QoS levels mapped to the packet switched transmission mode.

Preferably, said step of mapping is carried out by an Application Programming Interface (API) interposed between a user application, which is arranged to receive said  
20 transmitted data, and the RSVP layer. The API conveys the allocated QoS level to the RSVP layer and also causes a request to be made to the radio telephone network for the corresponding transmission mode.

One of said first and second hosts is preferably a mobile host, for example comprising a  
25 radio telephone wirelessly connected to the radio telephone network. More preferably, the step of transmitting the data over the internet is facilitated using Mobile IP to route data via the chosen transmission mode domain.

The radio telephone network is preferably a cellular telephone network. More  
30 preferably the telephone network is a GSM network, and said packet switched transmission mode is that known as GPRS. However, the present invention is also applicable to other cellular telephone networks and to satellite telephone networks.



According to a second aspect of the present invention there is provided apparatus for transmitting data between first and second Internet hosts coupled via the Internet and a digital radio telephone network, the apparatus comprising:

allocation means for allocating one of a plurality of predefined Internet Quality of Service (QoS) levels to the transmission, said QoS levels being defined in terms of the transmission delay over the Internet;

reservation means for reserving, if necessary, transmission capacity in the Internet to ensure the allocated QoS level is met;

transmission mode selection means for selecting one of a circuit switched or a packet switched transmission mode for transmitting the data over the radio telephone network, said selection being made on the basis of a mapping which maps at least one of the defined Internet QoS levels to the circuit switched transmission mode and maps the remaining QoS level(s) to the packet switched transmission mode; and

transmission means for transmitting said data over the Internet and said radio telephone network according to said allocated QoS and said selected radio telephone network transmission mode.

For a better understanding of the present invention and in order to show how the same may be carried into effect reference will now be made, by way of example, to the accompanying drawing, in which:

Figure 1 illustrates schematically a source host and a destination host connected together via the Internet;

Figure 2 illustrates schematically a mobile host coupled to the Internet via a GSM/GPRS cellular telephone network; and

Figure 3 illustrates the protocol layers required for a transmission via the system of Figure 2.

As has been described above, Figure 1 illustrates schematically a conventional Internet connection by way of which two hosts (SH and DH) may exchange Internet data according to the Internet Protocol (IP). The proposed Resource ReSerVation Protocol (RSVP) may be applied to such an Internet connection to define a quality of service (QoS) level for the transmission.

Figure 2 illustrates schematically the situation where a mobile host (MH) is connected to the Internet via a digital cellular telephone network. For the purpose of the present example, this network is a GSM phase 2 network which allows for the transmission of user data by either a High Speed Circuit Switched Data (HSCSD) transmission link or  
5 by a General Packet Radio Service (GPRS) link. As will be described below, Internet data may be transmitted between the MH and the Internet via either of these links.

The MH communicates with a Base Transceiver Station (BTS) of a Base Station Subsystem (BSS) of the GSM network. The BTS provides radio coverage for one cell  
10 of the network, with signals being relayed to and from the BTS by a Base Station Controller (BSC). The main function of the BSC is the management of the channels on the radio interface and of handovers when a MH enters or leaves the cell.

Figure 3 illustrates protocol layers provided at the MH, at the GSM network, and at a  
15 remote host (RH) connected to the Internet. It will be appreciated that these protocol layers are in practice implemented in software running on appropriate computer hardware, or by a combination of software and analogue components.

Consider that it is desired to transmit data from the RH to the MH. An application at  
20 the MH (which is the final destination for the transmitted data) allocates an RSVP QoS to this transmission prior to commencement of the transmission. The allocated QoS is conveyed to an Application Programming Interface (API) which has an RSVP extension. The API in turn conveys the allocated QoS to the RSVP layer. The RSVP layer is responsible for reserving sufficient capacity in the Internet to satisfy the  
25 allocated level of service. In the case of Guaranteed Service and Controlled Load Service, the RSVP must transmit control messages (Path and Resv) to the Internet to reserve capacity prior to receiving the application data. This is done via GPRS (QoS class 2). For Best Effort Service, no RSVP messages need to be transmitted.

30 The API additionally performs a mapping between the allocated RSVP QoS and transmission modes/QoS provided by the GSM cellular network, and initiates a telephone call according to the mapped mode/QoS. In particular, Guaranteed Service is mapped to HSCSD, Controlled Load Service is mapped to GPRS QoS class 3, and

Best Effort Service is mapped to GPRS QoS class 4. These GPRS QoS classes form part of the ETSI recommendation 02.60. In the event that HSCSD is selected as the transmission mode, the MH requests and receives an Internet address from the network using PPP. If, on the other hand, GPRS is the selected transmission mode, a

5 Gateway GPRS Support Node (GGSN) (see below) acts as a Home Agent for the MH and maps a unique Internet address to the line ID number of the MH.

At the RH, data for transmission to the Internet is generated by some top level application, usually a user operated application. The application generated data

10 ("application data") is interfaced to Internet protocol layers by a peer Application Programming Interface (API). The Internet protocol layers comprise the TCP and UDP layers and the IP layer (with Mobile IP extension), as well as an RSVP layer (this peer RSVP layer is only used when the RH wishes to receive data from the MH). The application data, now formatted according to IP, is transmitted via the RH's subnetwork

15 and a router to the Internet using reserved capacity if either Guaranteed or Controlled Load Services have been allocated. When the data reaches the GSM network, it is routed either to the GPRS network, via the GGSN, or to a HSCSD network via a further router. In the case of the former, data is formatted by a GPRS layer according to the determined GPRS QoS (class 3 or 4) and is passed to the BSS via a Serving GPRS

20 Support Node (SGSN). In the case of the latter, a Mobile Switching Centre (MSC) receives the IP formatted data and processes it according to an HSCSD layer before passing it to the BSS. It is noted that the Mobile IP is implemented in either the GGSN or the SGSN to route received data through the corresponding domain (i.e. GPRS or HSCSD) in the GSM network.

25

At the BSS, the BSC controls the allocation of radio channels in accordance with the selected radio transmission mode. The BTS then uses a radio protocol layer to apply the IP formatted data (in either GPRS or HSCSD format) to a carrier signal for transmission to the MH. The mobile host process the received data firstly at a Radio

30 layer to recover the GPRS/HSCSD formatted data, then at a GPRS or HSCSD layer to recover the IP formatted data, and then at an IP layer to recover the application data. The application data is then passed to the application layer at the MH via the API.

It will be understood that the above process is effectively carried out in reverse when data is to be transmitted from the application at the MH to a peer application at the RH.

5 It will also be appreciated by the skilled person that modifications may be made to the above described embodiment without departing from the scope of the present invention.

Glossary

API	Application Programming Interface
BSC	Base Station Controller
BSS	Base Station Subsystem
BTS	Base Transceiver Station
CSD	Circuit Switched Data
DH	Destination Host
DHCP	Dynamic Host Configuration Protocol
ETSI	European Telecommunications Standards Institute
GGSN	Gateway GPRS Support Node
GPRS	General Packet Radio Service
GSM	Global System for Mobile communications
HSCSD	High Speed Circuit Switched Data
IETF	Internet Engineering Taskforce
IP	Internet Protocol
MH	Mobile Host
MSC	Mobile Switching Centre
PPP	Point to Point Protocol
QoS	Quality of Service
R	Router
RH	Remote Host
RSVP	Resource Reservation Protocol
SGSN	Serving GPRS Support Node
SH	Source Host
SN	Subnetwork
TCP	Transfer Control Protocol
UDP	User Datagram Protocol

Claims

1. A method of transmitting data between first and second Internet hosts coupled via the Internet and a digital radio telephone network, the method comprising:

5 defining a plurality of Internet Quality of Service (QoS) levels in terms of the transmission delay over the Internet;

mapping at least one of the defined Internet QoS levels to a circuit switched transmission mode of the radio telephone network and mapping the remaining QoS level(s) to a packet switched transmission mode of the radio telephone network;

10 prior to transmitting said data, allocating one of said QoS levels to the transmission and, if necessary, reserving transmission capacity in the Internet to ensure the allocated QoS level is met; and

transmitting said data over the Internet and said radio telephone network, wherein the transmission over the radio telephone network uses the transmission mode  
15 mapped to the allocated QoS level.

2. A method according to claim 1, wherein said Internet QoS levels include: a guaranteed service level which guarantees both delay and bandwidth; a controlled load service level which provides a service level closely approximating the service level that  
20 would be provided by an unloaded network, even when the network is overloaded; and a best effort service which guarantees neither delay nor bandwidth.

3. A method according to claim 2, wherein the QoS levels are defined by a Resource ReSerVation Protocol (RSVP) which is also responsible for said reservation  
25 of transmission capacity in the Internet.

4. A method according to claim 2 or 3, wherein said guaranteed QoS level is mapped to the circuit switched transmission mode of the radio telephone network. the Internet and other Internet QoS levels are mapped to the packet switched transmission  
30 mode.

5. A method according to claim 4, wherein the packet switched transmission mode offers a number of QoS levels a sub-mapping is made between these QoS levels and the Internet QoS levels mapped to the packet switched transmission mode.

5 6. A method according to claim 4 or 5, wherein said step of mapping is carried out by an Application Programming Interface (API) interposed between a user application, which is arranged to receive said transmitted data, and the RSVP layer, the API conveying the allocated QoS level to the RSVP layer and also causing a request to be made to the radio telephone network for the corresponding transmission mode.

10

7. A method according to any one of the preceding claims, wherein one of said first and second hosts is a mobile host wirelessly connected to the radio telephone network.

8. A method according to claim 7, wherein the step of transmitting the data over the  
15 internet is facilitated using Mobile IP to route data via the chosen transmission mode domain.

9. A method according to claim 8, wherein the radio telephone network is a cellular telephone network.

20

10. A method according to claim 9, wherein the radio telephone network is a GSM network, and said packet switched transmission mode is GPRS.

11. Apparatus for transmitting data between first and second Internet hosts coupled  
25 via the Internet and a digital radio telephone network, the apparatus comprising:

allocation means for allocating one of a plurality of predefined Internet Quality of Service (QoS) levels to the transmission, said QoS levels being defined in terms of the transmission delay over the Internet;

reservation means for reserving, if necessary, transmission capacity in the  
30 Internet to ensure the allocated QoS level is met;

transmission mode selection means for selecting one of a circuit switched or a packet switched transmission mode for transmitting the data over the radio telephone network, said selection being made on the basis of a mapping which maps at least one

of the defined Internet QoS levels to the circuit switched transmission mode and maps the remaining QoS level(s) to the packet switched transmission mode; and

transmission means for transmitting said data over the Internet and said radio telephone network according to said allocated QoS and said selected radio telephone network transmission mode.

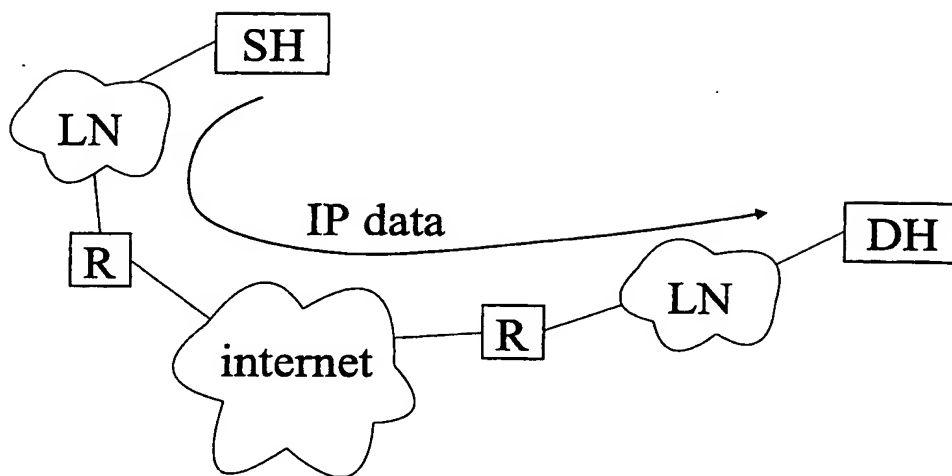
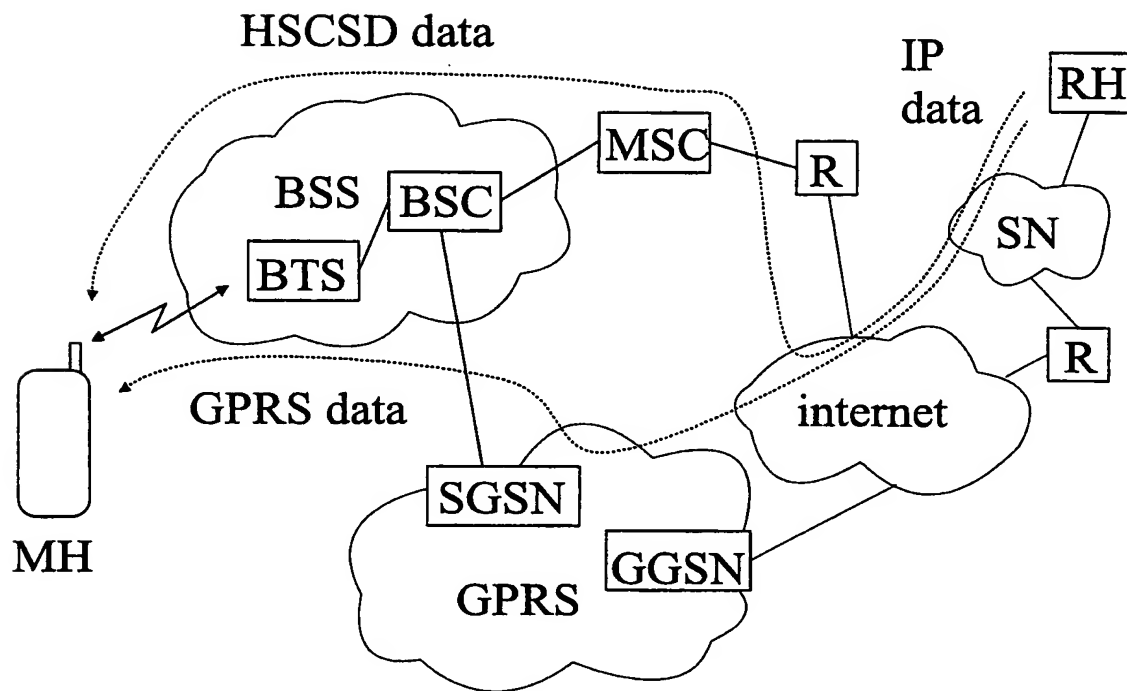
5

12. A mobile telecommunications device comprising the apparatus of claim 10.

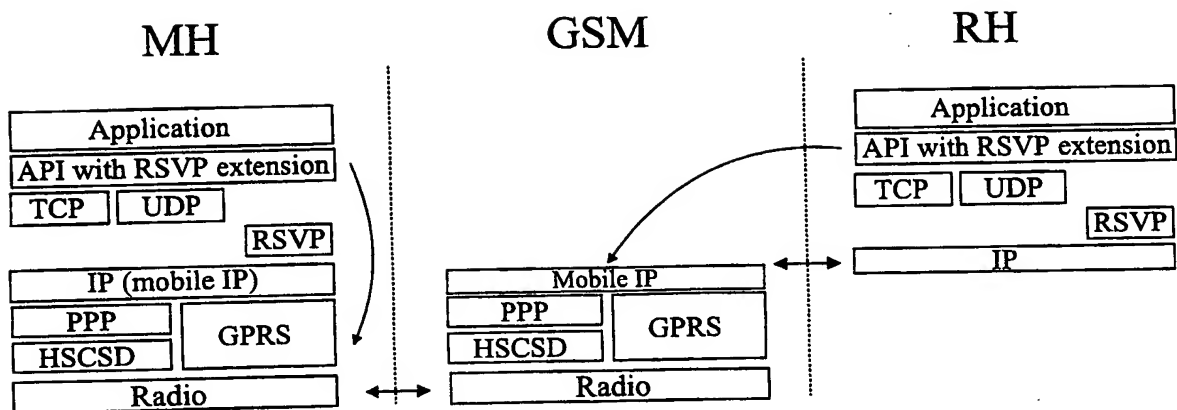
10



1/2

Figure 1Figure 2

2/2

Figure 3

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/FI 98/00948

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04Q 7/38, H04L 29/06  
According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04Q, H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  
SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 9531060 A1 (MOTOROLA INC.), 16 November 1995 (16.11.95), page 5, line 20 - page 6, line 2; page 8, line 12 - page 9, line 33 --	1,11
A	WO 9525407 A1 (SIERRA WIRELESS, INC.), 21 Sept 1995 (21.09.95), page 2, line 27 - page 3, line 9; page 3, line 19 - page 5, line 5 --	1,11
P,A	WO 9848593 A1 (NORTHERN TELECOM LIMITED), 29 October 1998 (29.10.98), page 6, line 26 - page 8, line 32, figure 2 --	1,11

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

\* Special categories of cited documents

"A" document defining the general state of the art which is not considered to be of particular relevance

"B" earlier document but published on or after the international filing date

"I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

7 June 1999

Date of mailing of the international search report

09 -06- 1999

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Jaana Raivio/MN  
Telephone No. +46 8 782 25 00

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 98/00948

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,A	WO 9857482 A1 (TELEFONAKTIEBOLAGET LM ERICSSON), 17 December 1998 (17.12.98), page 4, line 13 - line 28; page 7, line 15 - page 8, line 26  --	1,11
E	WO 9916266 A1 (TELEFONAKTIEBOLAGET LM ERICSSON), 1 April 1999 (01.04.99), page 8, line 17 - page 11, line 17; page 17, line 5 - line 18; page 18, line 17 - page 20, line 4, claims 1-3  -- -----	

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

03/05/99

International application No.

PCT/FI 98/00948

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9531060 A1	16/11/95	AU 2128995 A US 5729544 A ZA 9503607 A	29/11/95 17/03/98 03/01/96
WO 9525407 A1	21/09/95	AU 1943595 A	03/10/95
WO 9848593 A1	29/10/98	GB 2324435 A GB 2324436 A GB 2324437 A GB 9707832 D GB 9716331 D GB 9716333 D WO 9848591 A WO 9848592 A	21/10/98 21/10/98 21/10/98 00/00/00 00/00/00 00/00/00 29/10/98 29/10/98
WO 9857482 A1	17/12/98	AU 8045698 A	30/12/98
WO 9916266 A1	01/04/99	NONE	

**THIS PAGE BLANK (USPTO)**

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☒ **GRAY SCALE DOCUMENTS**

☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**HIS PAGE BLANK (USPTO)**